

**Panasonic Key management System
Mobile Softphone Management
Operation Manual for Dealer**


September, 2017

Mobile Softphone Management -OverView-

About Mobile Softphone Management

“Mobile Softphone Management” is different from “Activation Key Files” on following points.

- Bind the AK to a PBX(MPR ID) and register this information to the server.
Unlike the AK to be installed on PBX,
Mobile Softphone User AK does not require to download an AK file.
- Available type of Client AK : KX-UCMA0** W/Sell at Web, X/Sell by Card

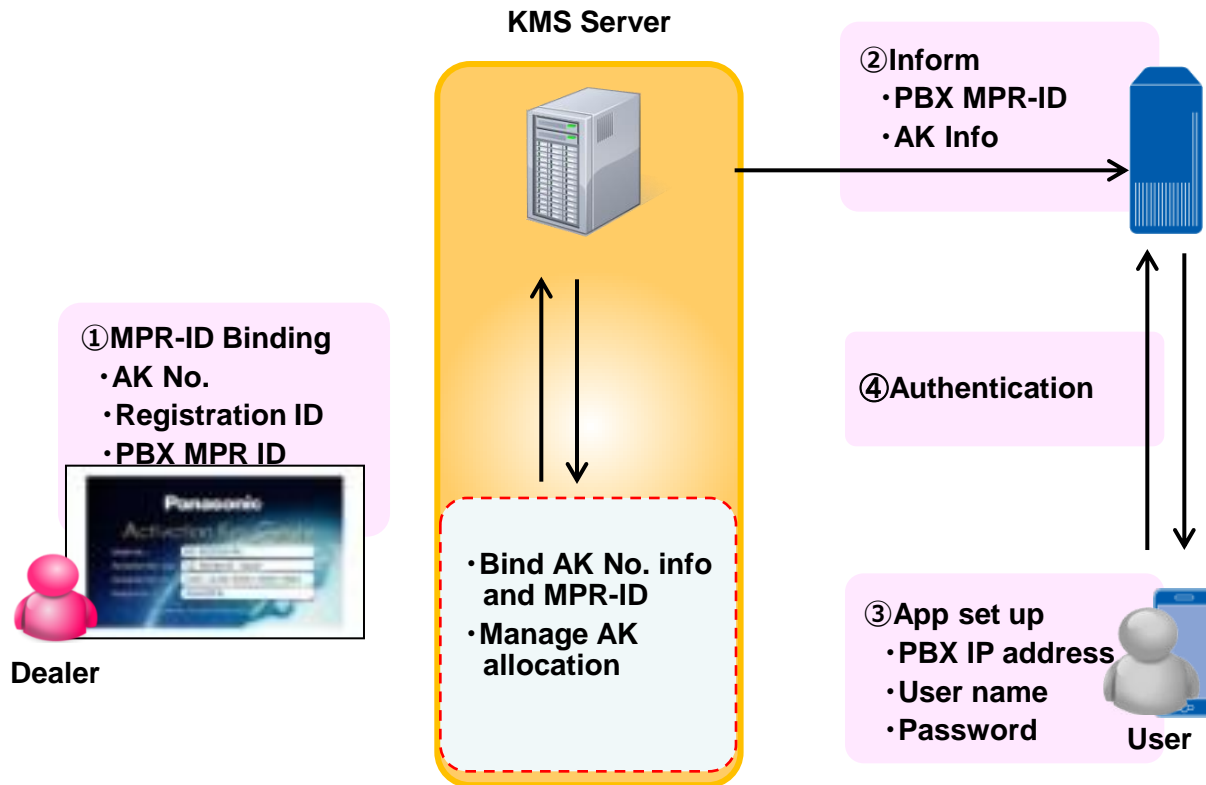



Mobile Softphone Management -OverView-

About Mobile Softphone Management


“Mobile Softphone Management” provides following features.

Feature Name	Overview
MPR ID Binding	- Bind AK No. to MPR ID.
Alternative MPR-ID	- Check the following status of the Current MPR ID. <ul style="list-style-type: none">- Alternative MPR ID- Expiry date of Alternative MPR ID- active users / total users - Bind the AK No. to an alternative MPR ID for 10-day temporary use *The Available AK No. on the alternative MPR ID are same as the Current MPR ID.
Check AK Status	- Check If a certain AK No. has been bound, when activated.
Make Report	- Output binding history to a CSV file

Mobile Softphone Management -Operation Flow-

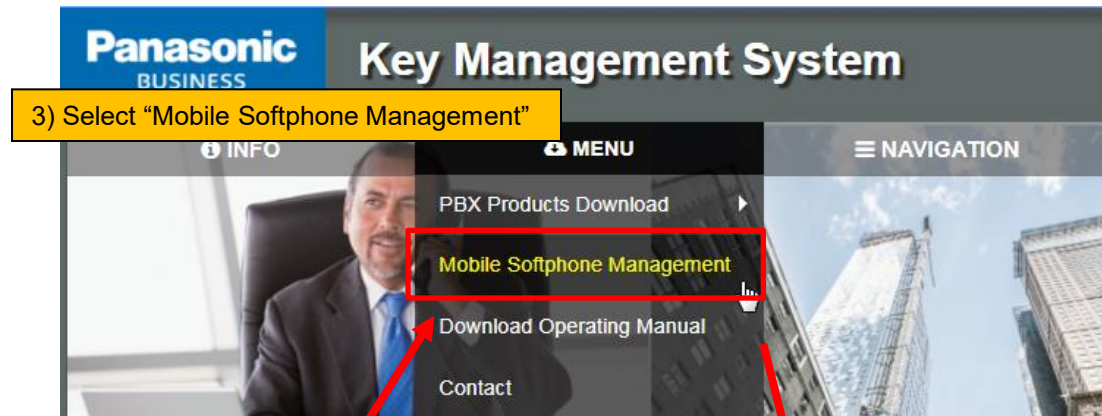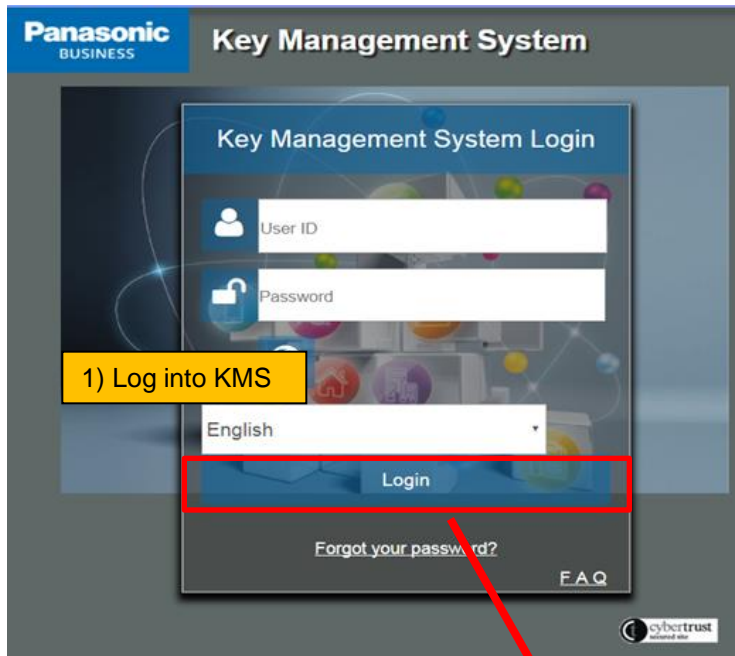

Proceed to next slide step "4)"

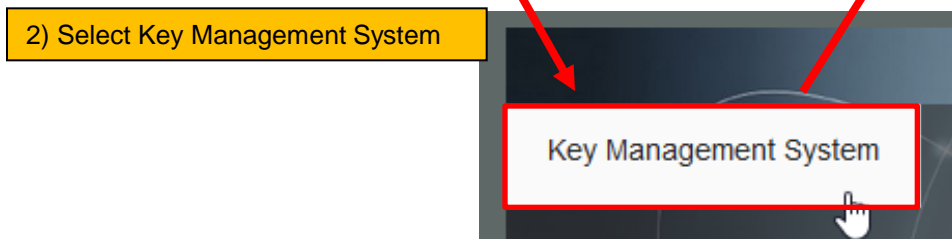

**The content differs depending on the user.*

Mobile Softphone Management -Operation Flow-

The screenshot displays the Panasonic Business Key Management System interface. The top navigation bar includes the Panasonic logo, the word "BUSINESS", and the text "Key Management System". On the right side of the top bar are "Return to menu" and "Logout" buttons. A left sidebar menu is highlighted with a red border and contains the following items: "HOME", "MPR ID Binding", "Alternative MPR ID", "Check AK Status", and "Make Report". A red arrow points from the "Item" button in the top navigation bar to the "MPR ID Binding" item in the sidebar menu. A yellow callout box labeled "4) Click 'Item'" is positioned over the "Item" button, and another yellow callout box labeled "5) Select Items" is positioned over the "MPR ID Binding" item. The main content area features a large graphic with the text "Information Linking Business with Versatile Mobility" and a paragraph describing the Panasonic Mobile Softphone application.

Panasonic BUSINESS **Panasonic** **Key Management System**

HOME

Item

Return to menu Logout

MPR ID Binding

Alternative MPR ID

Check AK Status

Make Report

Information

Linking Business with Versatile Mobility

Panasonic Mobile Softphone is a simple application that brings audio and visual communication together in your mobile device. It lets you use your cell phone just the way you want, while maximizing security and minimizing costs.

MPR ID Binding -Operation Flow-

Panasonic BUSINESS

1) Select "MPR ID Binding"

MPR ID Binding

Alternative MPR ID

Check AK Status

Make Report

The screenshot shows the MPR ID Binding interface. At the top, there are buttons for "Return to menu" and "Logout". The main heading is "MPR ID Binding". Below it, there is a section for "MPR ID" with a text input field containing "****_****_****_****" and a "Confirm" button. Below that is a section for "Activation Key 1" with fields for "Activation Key No." (containing "****_****_****_****") and "Registration ID" (containing "*****"). There is also an "+Add more" button. A red arrow points from the "MPR ID Binding" menu item in the left sidebar to the "MPR ID" section. Another red arrow points from the "Confirm" button to the "Confirm" step in the flowchart.

2) Enter "MPR ID"

4) Click "Confirm"

Proceed to next slide step "5)"

3) Enter
"Activation Key No." and
"Registration ID"

*) If activate some keys at one time, click "+Add more" and proceed 3).

The screenshot shows two sections for activation keys. "Activation Key 2" has an "Activation Key No." field with "1111-1111-1111-1111-1111" and a "Registration ID" field with "1234AbCd". "Activation Key 3" has an "Activation Key No." field with "1111-1111-1111-1111-1111" and a "Registration ID" field with "1234AbCd".

MPR ID Binding -Operation Flow-

4) If needed, check "Send Email"

Confirm Before Submit

Send Email [redacted]@jp.panasonic.com

Subject: Binding succeeded / [redacted]

MPR ID : [redacted]

PBX Model : KX-UCMA001X

Bind Now

No.	Activation Key No.	Model No.	Activation Key Type	Expiration Date (+0900 JST, MM/DD/YYYY)
1	[redacted]	KX-UCMA001X	1 Mobile Softphone	Unlimited duration

Existing Activation Key No. List

No.	Activation Key No.	Model No.	Activation Key Type	Registration Date (+0900 JST, MM/DD/YYYY)
1	[redacted]	KX-UCMA001X	1 Mobile Softphone	08/02/2017

5) Click "Bind Now"

6) Click "OK"

CONFIRMATION

Are you sure you want to binding of Activation Key No and send binding information to the e-mail address shown below?

OK Cancel

7) Completed

Binding succeeded.

Bind Now

Return to Home



Dear ****Company/ representative

The following Activation Key has been bound.

MPR ID ----- ****-****-****-****
 PBX Model ----- KX-*****
 Downloaded Date(+0900 JST, MM/DD/YYYY) -- 08/04/2017 10:20:54

Activation Key details

Activation Key No.	: Model No.	: Activation Key Type	: Expiration Date
****-****-****-****-****	: KX-UCMA001X	: 1 Mobile Softphone	: Unlimited duration

Existing Activation Keys List

Activation Key No.	: Model No.	: Activation Key Type
****-****-****-****-****	: KX-UCMA001X	: 1 Mobile Softphone

(Note)
 This e-mail has been sent by an automatic e-mail distribution system.
 This system is unable to respond to any e-mails.
 For initial support please contact your local administrator.

Thank you.

Alternative MPR ID -Operation Flow-

1) Select "Alternative MPR ID"

2) Enter "Current MPR ID"

3) Click "Confirm"

4) Completed. The status of current MPR ID is displayed. Proceed to next slide step "5)" when binding alternative MPR ID to current MPR ID.


No.	Activation Key No.	Model No.	Activation Key Type
1	[Redacted]	KX-UCMA001X	1 Mobile Softphone

Alternative MPR ID	Valid Until MM/DD/YYYY(JST)	Active Users/Total Users
[Redacted]	09/08/2017	0/1



The status of current MPR ID

Activation Key No.	The AK information bound to current MPR ID.
Model No.	
Activation Key Type	
Alternative MPR ID	The alternative MPR ID bound to current MPR ID.
Valid Until	The validated date of the AK on the alternative MPR ID.
Active Users/Total Users	The number of the mobiles softphone active users and total users on the MPR ID.

Alternative MPR ID -Operation Flow-

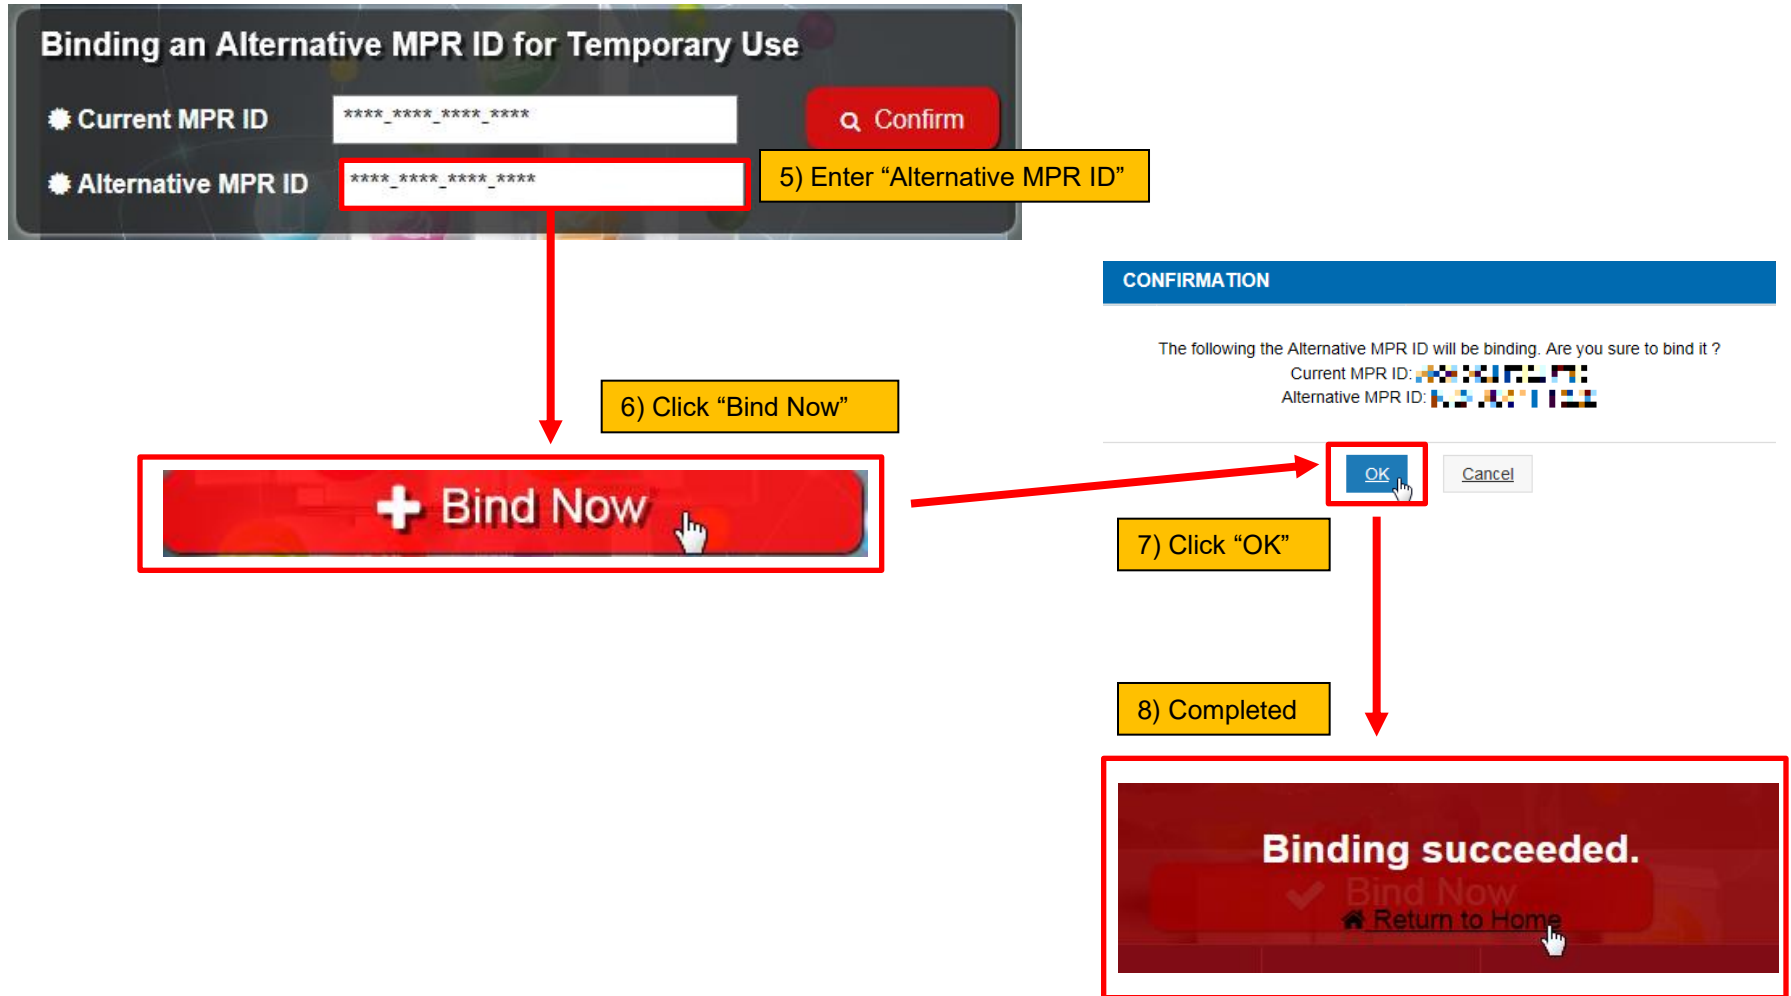

Check AK Status -Operation Flow-

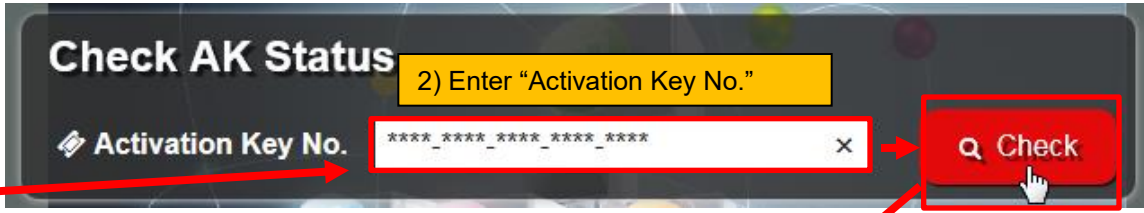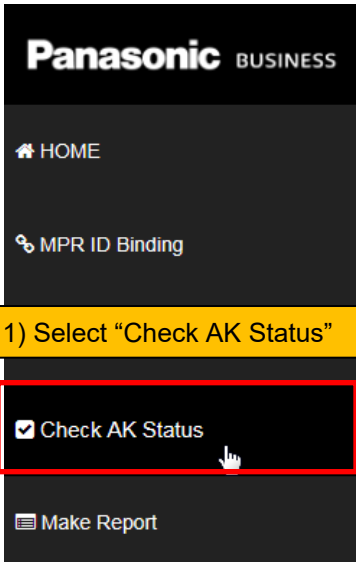



3) Click "Check"

4) Completed. The status of only an AK for mobile softphone is displayed.

Activation Key No.	Status
██████████	Used

Status	
Used	This Activation key has already been bound
Not Used	This Activation key has not been bound
prohibited	This Activation key can not be used

Make Report -Operation Flow-

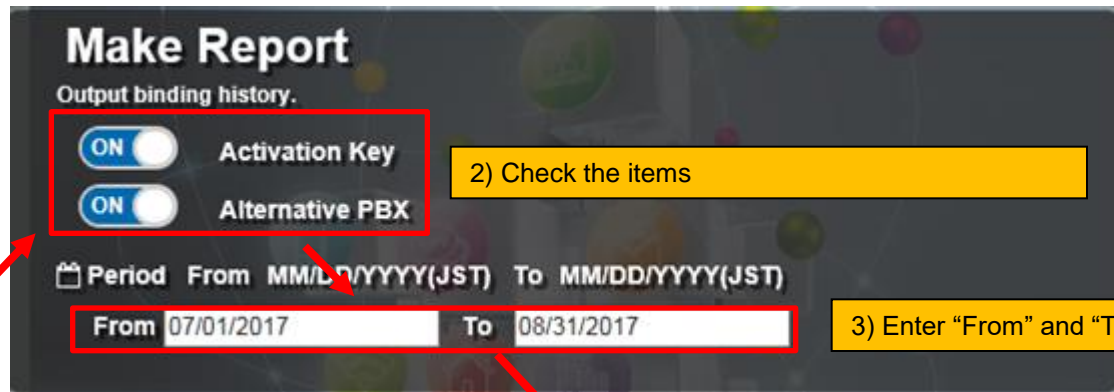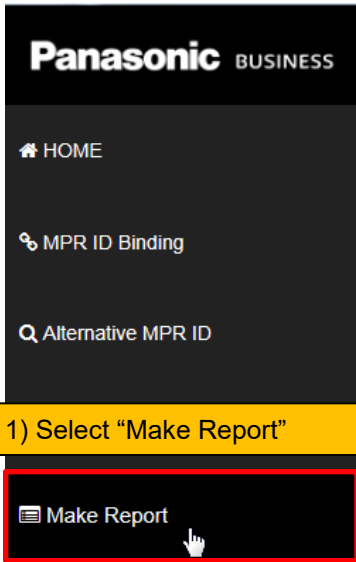

MobileSoftphone_Regist_history_XXXXXXXXX.CSV

	A	B	C	D	E
1	Download history				
2	User name:	XXXXXXXXXX			
3	Date: (+0900JST, MM/DD/YYYY)	XX/XX/XXXX			
4	Term:	07/01/2017	-	08/31/2017	
5	Date (+0900JST, MM/DD/YYYY)	Time	Type	Sales Company Name	Dealer Company Name
7	08/02/2017	10:56:10	ACT	XXXXXXXXXX	XXXXXXXXXX
8	08/02/2017	13:22:13	ACT	XXXXXXXXXX	XXXXXXXXXX
9	08/02/2017	13:32:50	ACT	XXXXXXXXXX	XXXXXXXXXX
10	08/04/2017	10:20:54	ACT	XXXXXXXXXX	XXXXXXXXXX
11	08/29/2017	17:29:06	TMP	XXXXXXXXXX	XXXXXXXXXX

- 5) Completed.
The downloaded ".csv" file has following information.
- Date(+0900JST, MM/DD/YYYY)
 - Time
 - Type
 - Sales Company Name
 - Dealer Company Name
 - Model No.
 - Activation Key Type
 - Activation Key No.
 - Registration ID
 - Bind Count
 - Alternative Count
 - System Reset Count
 - PBX Models
 - MPR ID
 - Alternative MPR ID
 - Valid days
 - Expiration Date
 - IP Address
 - Field Test